
WHEN SERVICING THIS CHASSIS, UNDER NO CIR-

NAL CIRCUIT. SPECIAL COMPONENTS ARE SHADED NOTE:

ON THE SCHEMATIC FOR EASY IDENTIFICATION. THIS CIRCUIT DIAGRAM MAY OCCASIONALLY DIF-CUMSTANCES SHOULD THE ORIGINAL DESIGN BE FER FROM THE ACTUAL CIRCUIT USED. THIS WAY, 2. Voltages are DC-measured with a digital voltmeter CUMSTANCES SHOULD THE ORIGINAL DESIGN BY
MODIFIED OR ALTERED WITHOUT PERMISSION IMPLEMENTATION OF THE LATEST SAFETY AND FROM THE ZENITH ELECTRONICS CORPORATION.
ALL COMPONENTS SHOULD BE REPLACED ONLY WITH TYPES IDENTICAL TO THOSE IN THE ORIGIUTH SET IS NOT DELAYED UNTIL THE NEW SERVICE LITERATURE IS PRINTED.

- 1. Shaded(■) parts are critical for safety. Replace only with specified part number.
- during Play mode.

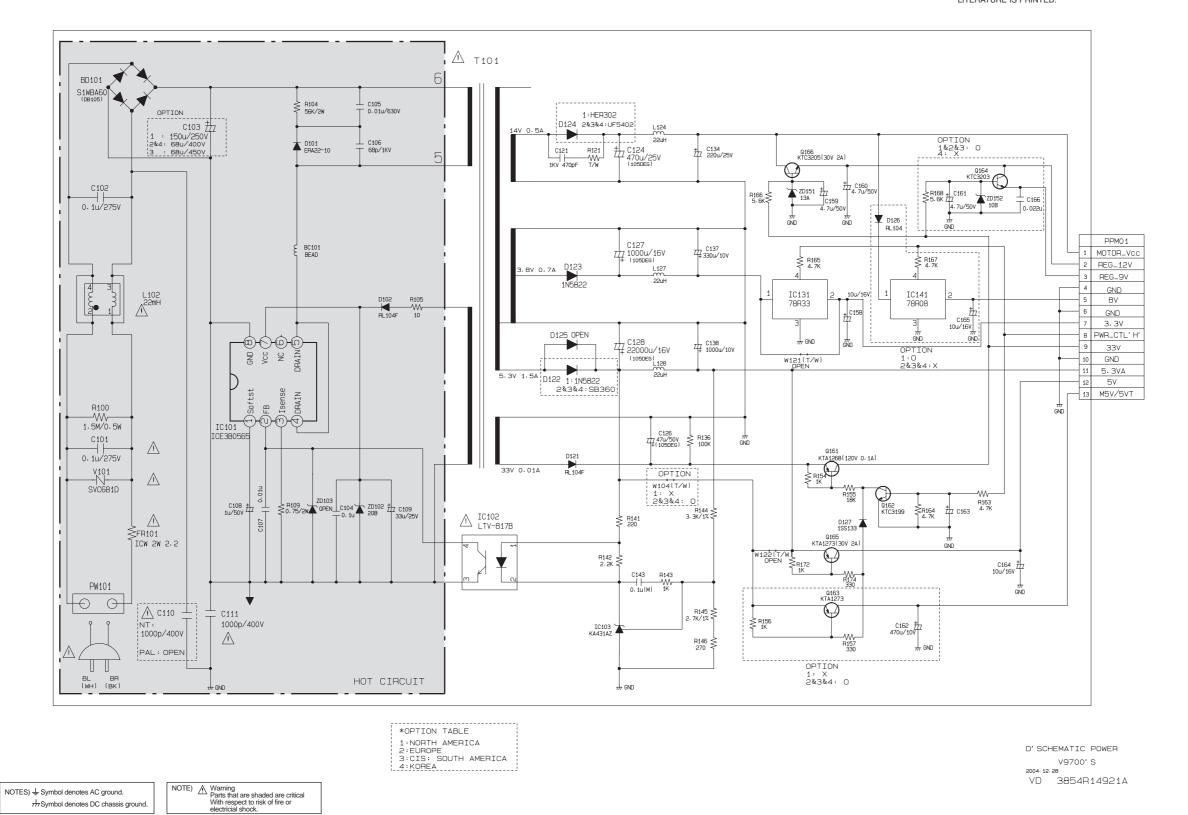

12

10

2